

# DISPLAY P90

30 m  
IP67



## DISPLAY P90

What we intended when we developed a design luminaire in IP67? Nothing! It was our customers who gave us the idea. We say thank you for the inspiration for the P90.



DISPLAY P90 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	30 m	
Degree of protection	IP67	
Class	I	
Enclosure material	Stainless steel	
Enclosure colour/surface	brushed	
Terminal block	3 x 2.5 <sup>□</sup> for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.1 VA/6.0 W	
Supply voltage	230V ± 10 %, 50/60Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	4.8 V/0.8 Ah (NiMH)	


VERSIONS

1 h with auto-check   with BUS check		•   •
3 h with auto-check   with BUS check		•   •
8 h with auto-check   with BUS check		
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %	•	

SPECIAL FEATURE

- Very high degree of protection (IP67)

P90W WALL MOUNTED

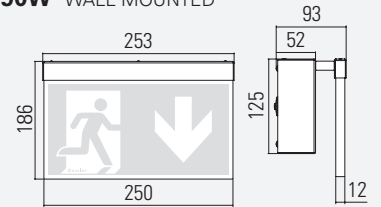

P90D CEILING MOUNTED

