

# PRIMUS PS4 IP65 LED



**PS4D** | IP65 | SYSTEM LUMINAIRE  
RECHARGEABLE BATTERY LUMINAIRE



**PS4E** | IP65 | SYSTEM LUMINAIRE  
RECHARGEABLE BATTERY LUMINAIRE

Our PS4 is a real all-rounder. The high degree of protection and the impact resistant enclosure designed to be resistant to ball throwing makes the PS4 the right choice for sports facilities, public areas, swimming pools and food production facilities (IFS standard and HACCP regulation).

|                          |   |                       |
|--------------------------|---|-----------------------|
| Degree of protection     | IP65                                    |                       |
| Class                    | I                                       |                       |
| Enclosure material       | Stainless steel                         |                       |
| Enclosure colour/surface | brushed                                 |                       |
| Terminal block           | 3 x 2.5 <sup>2</sup> for through wiring |                       |
| Light source             | 4 x 1 W power LED                       |                       |
| Ambient temperature      | -20° C to +40° C                        | 0° C to +40° C        |
| Connected load (AC/DC)   | 13.2 VA/6.7 W                           |                       |
| Supply voltage           | 230V ± 10 %, 50/60 Hz/176-275 V DC      | 230V ± 10 %, 50/60 Hz |
| Rechargeable battery     | 3.6 V/2.5 Ah (NiCd)                     |                       |

VERSIONS

|                                      |   |         |
|--------------------------------------|---|---------|
| 1 h with auto-check   with BUS check |   | •*   •* |
| 3 h with auto-check   with BUS check |   | •*   •* |
| 8 h with auto-check   with BUS check |   | •*   •* |
| without monitoring module            | • |         |
| with monitoring module               | • |         |
| with DALI monitoring                 | • |         |


SPECIAL FEATURE

- High degree of protection (IP65)
- Version resistant to ball throwing - suitable for sports facilities
- Chlorine-resistant enclosure - suitable for swimming pools
- Fulfils the IFS standard and the HACCP regulation (food industry)


OPTIONS /ACCESSORIES

- Remote supply unit (rechargeable battery luminaire) for mounting in temperature controlled area. Connection cable max. 4 m (2.5 mm<sup>2</sup>) provided on site\*.
- Concrete adapter for surface-mounted installation
- Wall bracket arm (lockable in 15° increments)
- Aluminium enclosure in RAL 9016 (white) and RAL 7024 (graphite grey) | Other colours on request


PS4D CEILING MOUNTED



CEILING INSTALLATION WITH CONCRETE ADAPTER




PS4E RECESSED CEILING INSTALLATION




Ceiling cutout: 170 x 170 mm  
Maximum ceiling thickness: 42 mm

PS4A WALL BRACKET MOUNTING

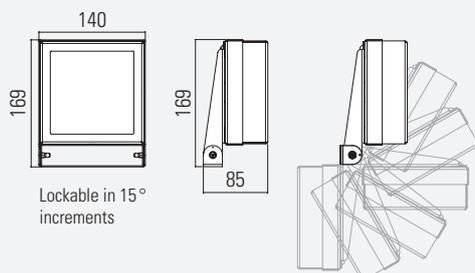

Lockable in 15° increments

\*REMOTE SUPPLY UNIT (OPTIONAL)



Remote supply unit for rechargeable battery luminaire for mounting in temperature-controlled indoor area  
Cable length max. 4 m (2.5 mm<sup>2</sup>) provided on site