


DISPLAY DR7 31 m IP41




DISPLAY DR7

An exit sign luminaire not only indicates the direction of the escape route, it can also set design accents. Elegant, slim and always in the spotlight, our DR series is a luminaire supermodel.

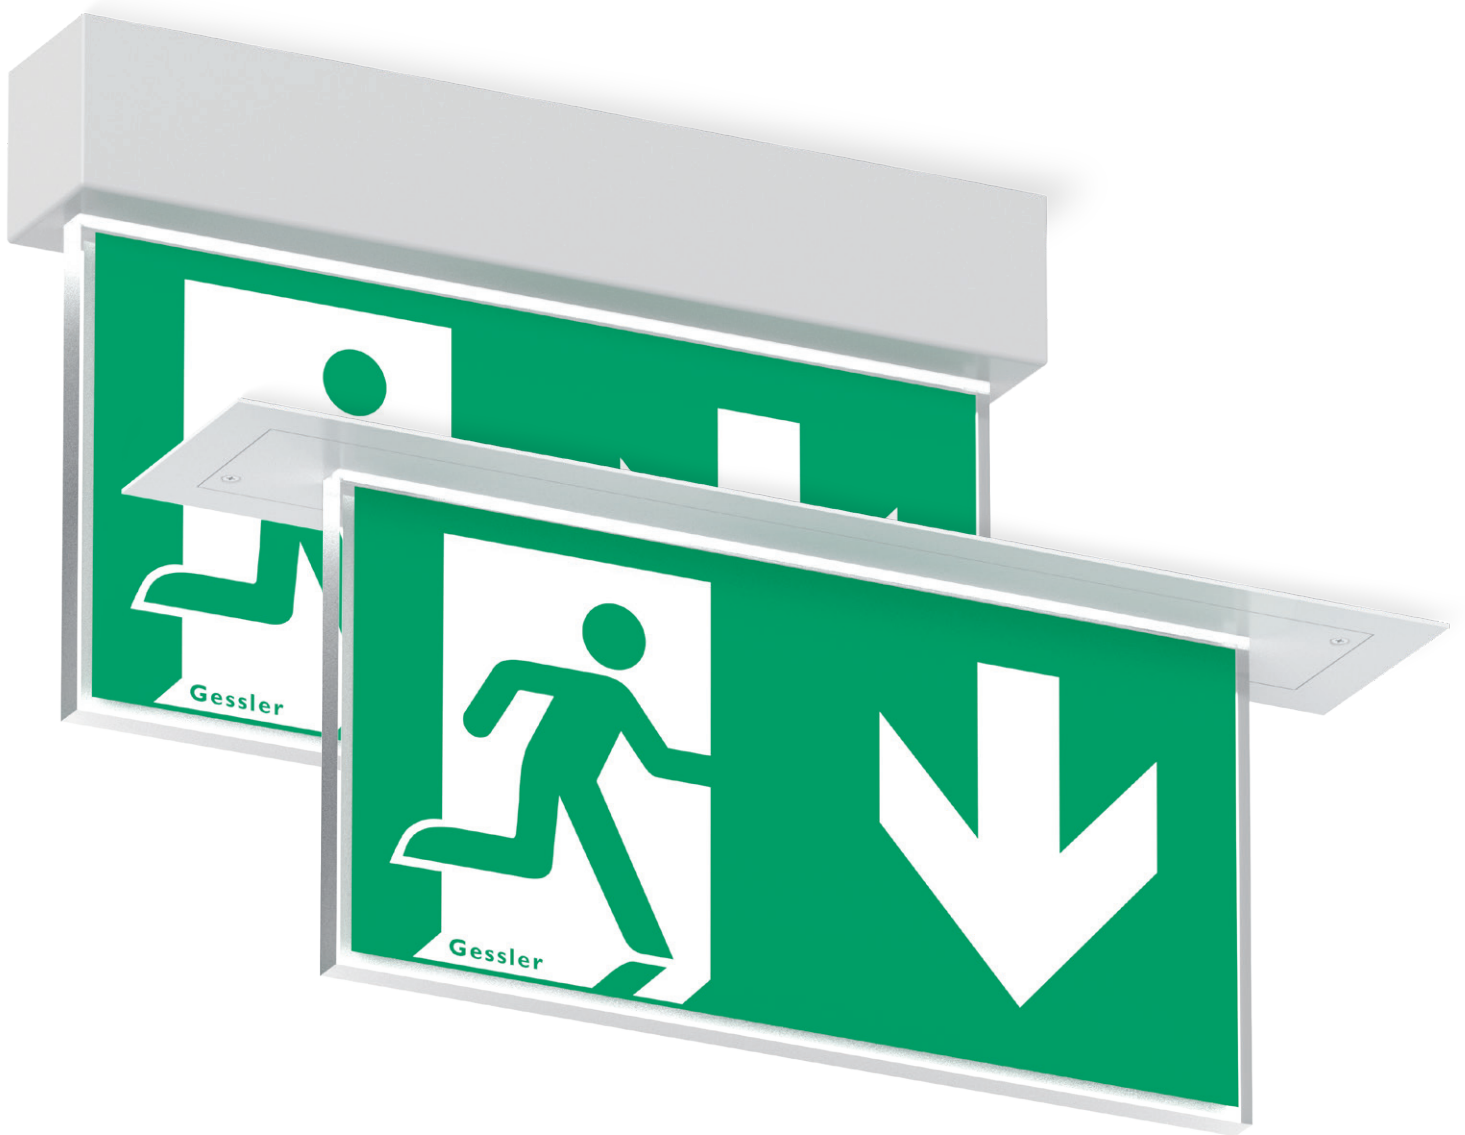


DISPLAY DR7	SYSTEM LUMINAIRE
Viewing distance	31 m
Degree of protection	IP41
Class	I
Enclosure material	Sheet steel
Enclosure colour/surface	RAL 9016 (white)
Terminal block	3 x 2.5 ² for through wiring
Light source	LED
Ambient temperature	-20° C to +40° C
Connected load (AC/DC)	4,1 VA/4,0 W
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC
Rechargeable battery	
VERSIONS	
1 h with auto-check with BUS check	
3 h with auto-check with BUS check	
8 h with auto-check with BUS check	
without monitoring module	•
with monitoring module	•
with DALI monitoring	•
Cinema version	
Luminous flux in normal mode 10 %	
OPTIONS / ACCESSORIES	
- Cable lengths up to 6 m Enclosure made of brushed stainless steel Ball guard Concrete casting pot Concrete adapter Other RAL colours on request	


DR7W WALL MOUNTING

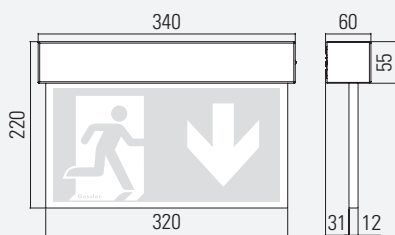


DR7D CEILING MOUNTING

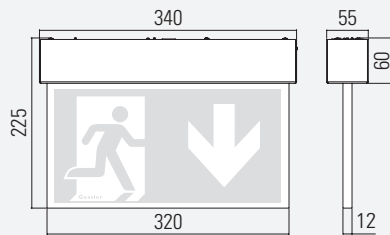


DR7P PENDANT MOUNTING

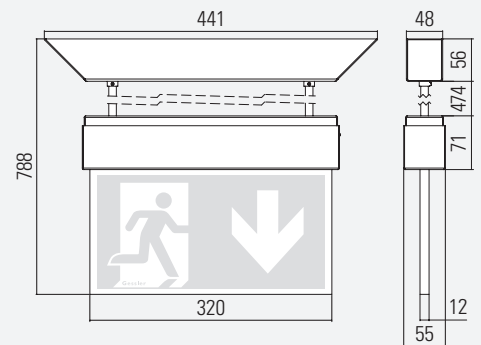


DR7Ö EYELET MOUNTING

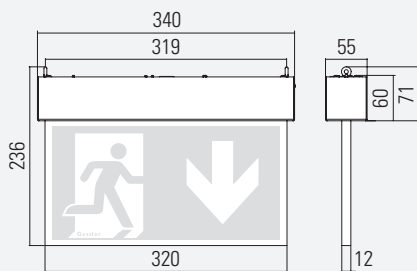


DR7A WALL BRACKET MOUNTING

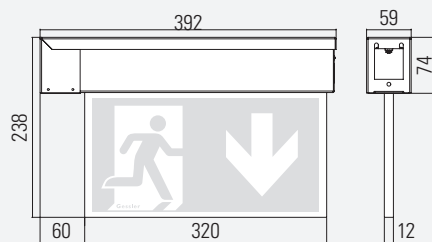


DR7S CABLE SUSPENSION MOUNTING

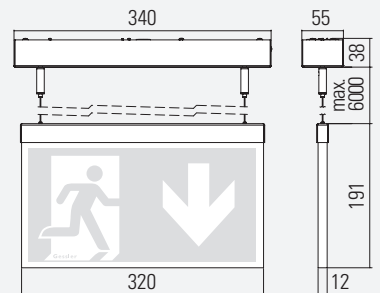

DR7E RECESSED CEILING MOUNTING

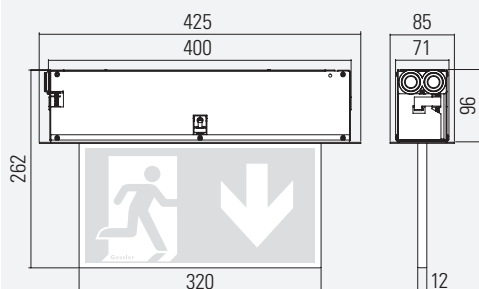

DR7F RECESSED CABLE SUSPENSION MOUNTING

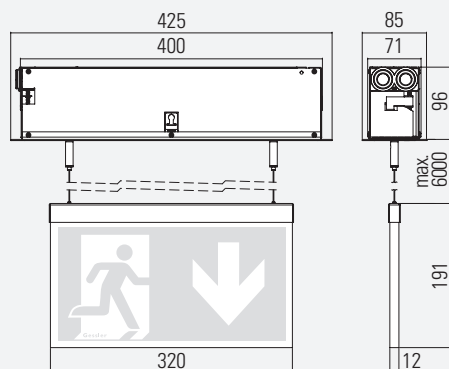

DR7E und DR7F
Ceiling cutout: 405 mm x 75 mm
Maximum ceiling thickness: 43 mm