

LUMINA 2000/8

38 m
IP40



LUMINA 2000/8

Clear edge. Our design classic has been successful for 20 years and is also still produced with the tried and tested light emission window.



Viewing distance	38 m	
Degree of protection	IP40	
Class	I	
Enclosure material	Aluminium	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 ² for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)	

VERSIONS

1 h with auto-check with BUS check		• •
3 h with auto-check with BUS check		• •
8 h with auto-check with BUS check		• •
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %		


SPECIAL FEATURE

- Pictogram set included
- Enclosure with additional window for downward light emission


OPTIONS /ACCESSORIES

- Ball guard
- Other RAL colours on request


L08W WALL MOUNTED

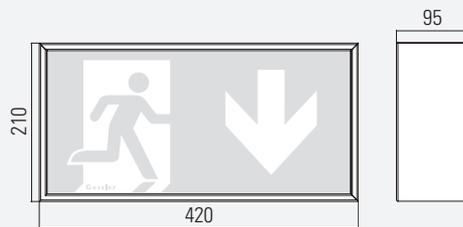


L08D CEILING MOUNTED

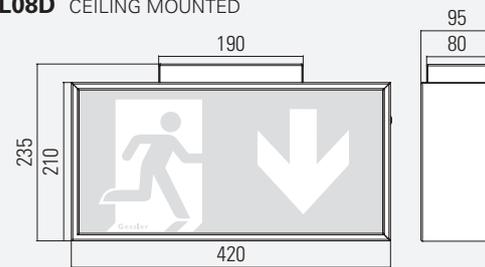

L08P PENDANT

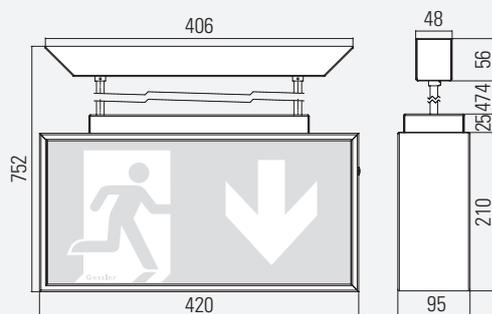

L08Ö EYE INSTALLATION

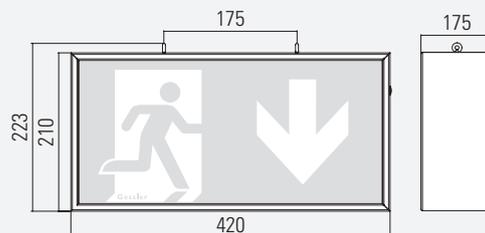

L08A WALL BRACKET MOUNTING

