


# EXIT SIGN CUBE 35 m | 60 m IP40 | IP54 | IP40

## EXIT SIGN CUBE W35 | W60

If several routes lead to an emergency exit, an exit sign cube is the right choice. The pictograms of the frameless acrylic glass hood are applied using the screen printing method.

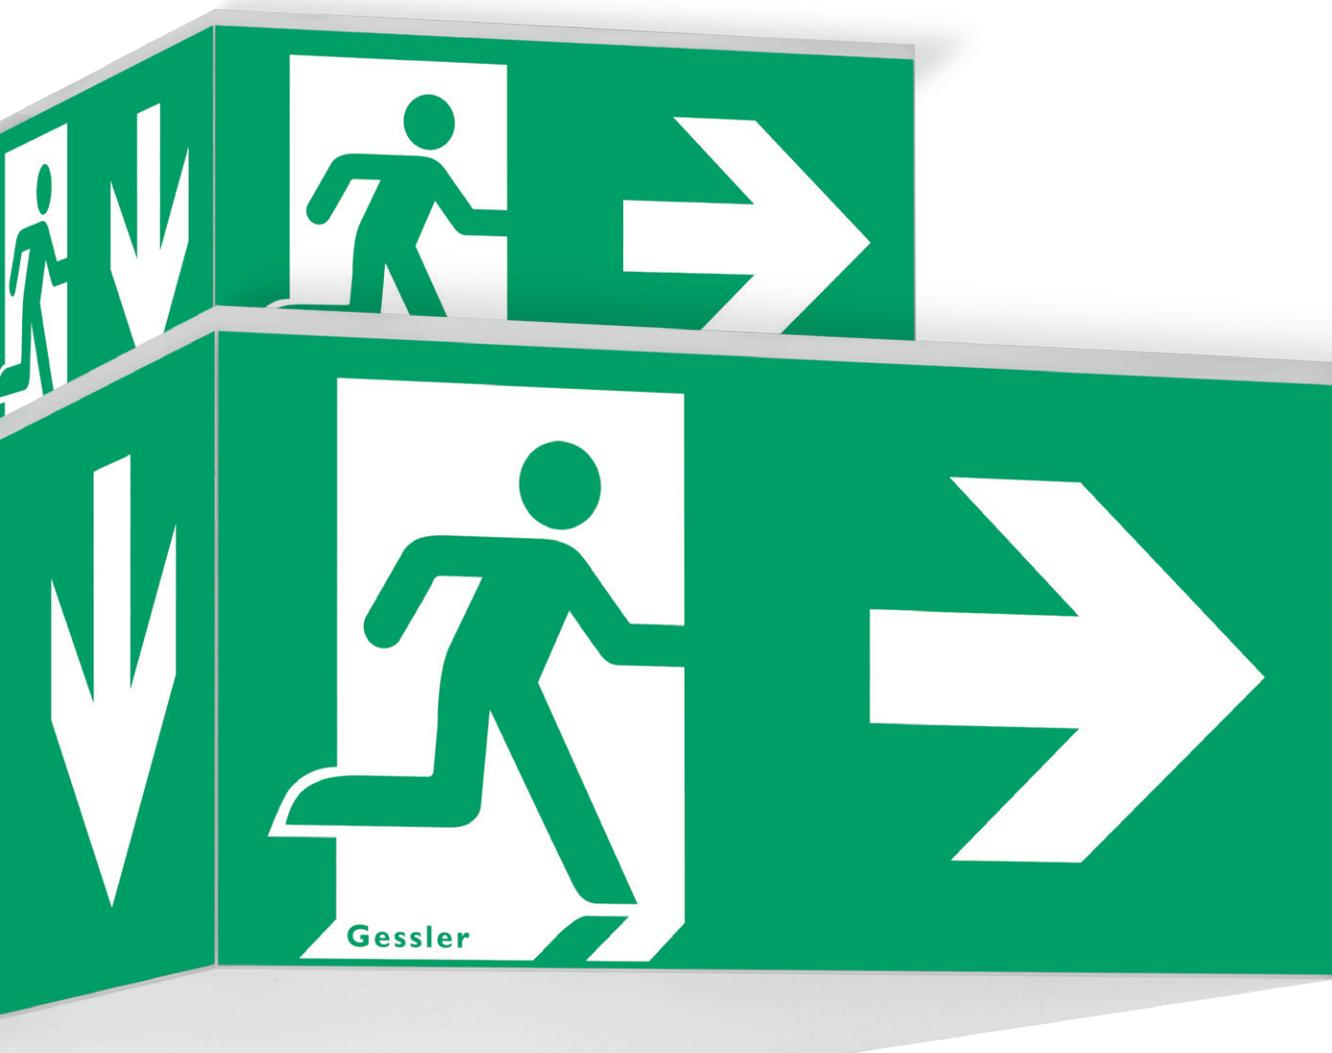

EXIT SIGN CUBE W35

SYSTEM LUMINAIRE

RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	35 m	
Degree of protection	IP40   IP54	
Class	I	
Enclosure material	Acrylic glass	
Enclosure colour/surface	opal	
Terminal block	3 x 2.5 <sup>2</sup> for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/6 W	-
Supply voltage	230V ± 10 %, 50/60 Hz / 176-275 V DC	230 V AC
Rechargeable battery	-	3.6 V/2.5 Ah (NiCd)

VERSION

1 h   with auto-check   BUS check		•   •
3 h   with auto check   BUS check		•   •
8 h   with auto check   BUS check		•   •
without monitoring	•	
with monitoring	•	
DALI monitoring	•	
Cinema version		


SPECIAL FEATURE

- Pictograms are attached by the screen printing method (no adhesive film)
- All-round green printing


OPTIONS /ACCESSORIES

- Degree of protection: IP54 (except pendant) – Deviating dimensions: Increase of approx. 4 mm in the width and 7 mm in the height


**W35W** WALL MOUNTED

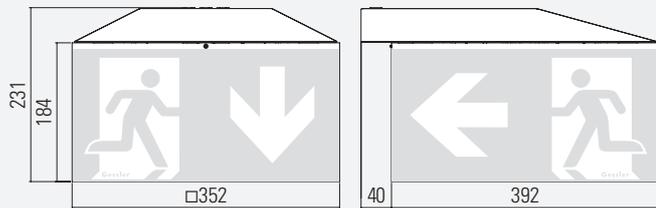


**W35D** CEILING MOUNTED

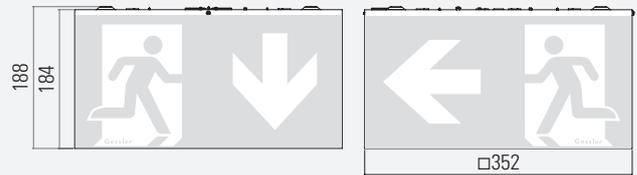


**W35P** PENDANT

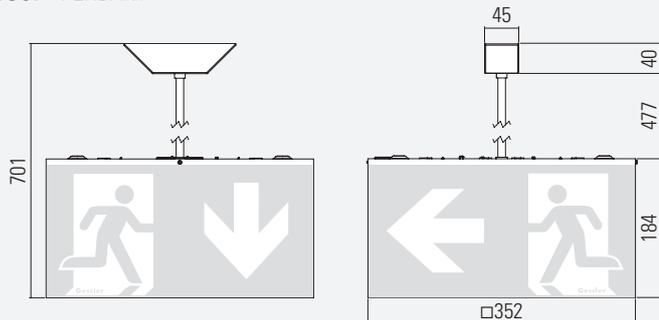

**W35S** SUSPENDED

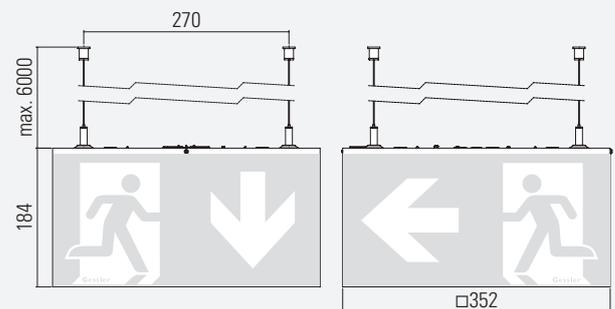

**W35Ö** EYE INSTALLATION

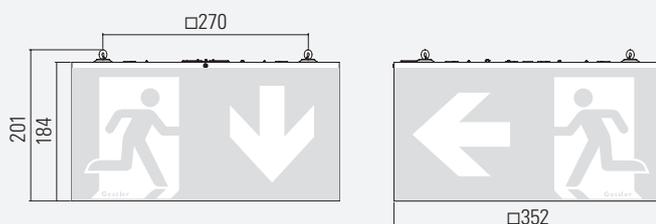

W35

**EXIT SIGN CUBE W60**

**SYSTEM LUMINAIRE**

Viewing distance	60 m
Degree of protection	IP40
Class	I
Enclosure material	Acrylic glass
Enclosure colour/surface	opal
Terminal block	3 x 2.5 <sup>□</sup> for through wiring
Light source	LED
Ambient temperature	-20° C to +40° C
Connected load (AC/DC)	172 VA/14.7 W
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC
Rechargeable battery	

**VERSION**

1 h   with auto-check   BUS check	
3 h   with auto check   BUS check	
8 h   with auto check   BUS check	
without monitoring	•
with monitoring	•
DALI monitoring	•
Cinema version	


**SPECIAL FEATURE**

- Pictograms are attached by the screen printing method (no adhesive film)
- All-round green printing


**W60D CEILING MOUNTED**



**W60S SUSPENDED**

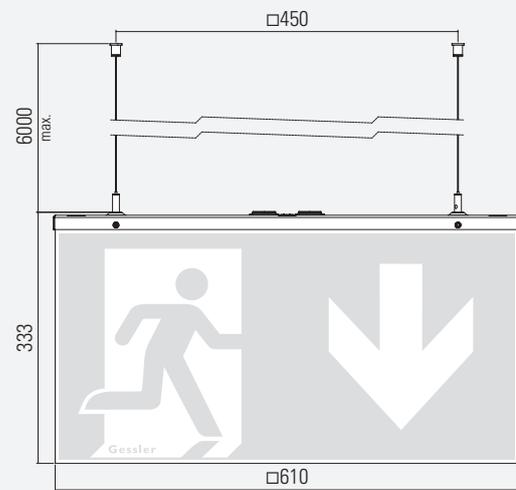

**W60Ö EYE INSTALLATION**

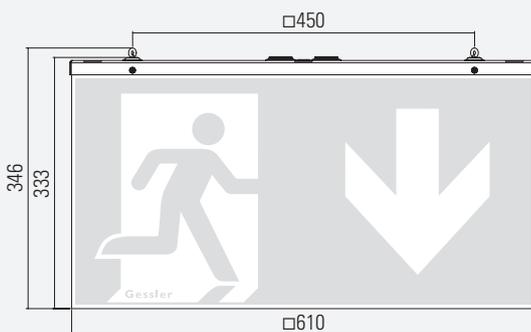

W60