



LUMINA 2000/12

30 m
IP41

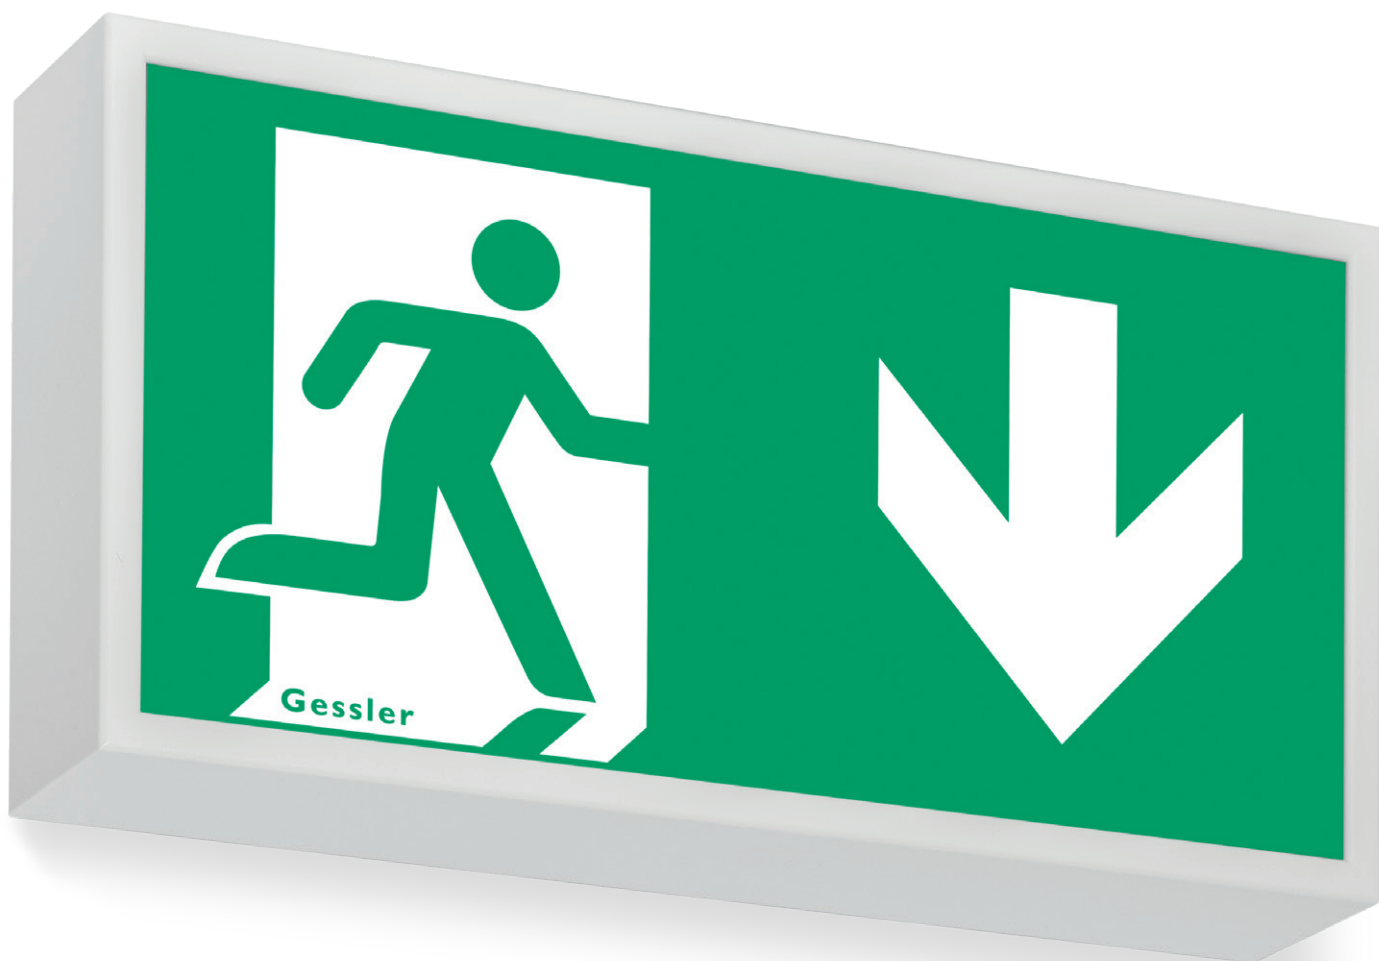

LUMINA 2000/12

Square, practical, green. The CIE 93.2 is responsible for the latter. With the Lumina 2000/12, we have ensure that this green is still visible from a distance of 30 m.

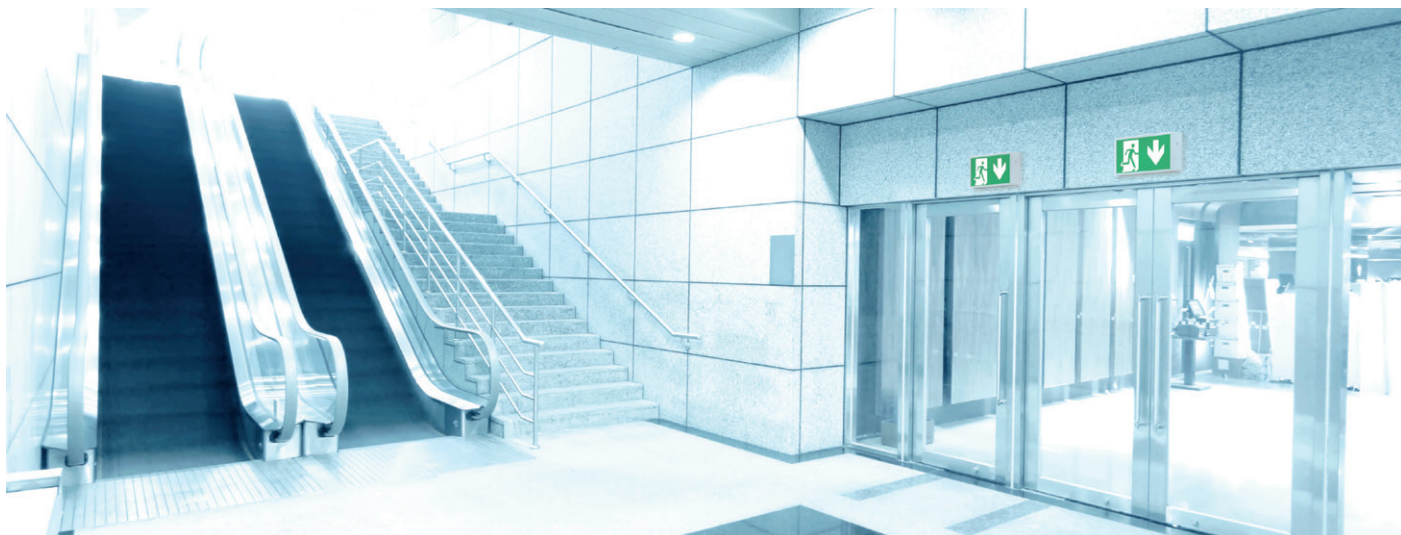

LUMINA 2000/12 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	30 m	
Degree of protection	IP41	
Class	I	
Enclosure material	Aluminium	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 [□] for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.3 VA/5.6 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	-	3.6 V/2.5 Ah (1h/3h) (NiCd)

VERSIONS

1 h with auto-check with BUS check		• •
3 h with auto-check with BUS check		• •
8 h with auto-check with BUS check		
without monitoring module	•	
with monitoring module	•	
with DALI monitoring		
Cinema version	•	
Luminous flux in normal mode 10 %		


SPECIAL FEATURE

- Pictogram set included

OPTIONS /ACCESSORIES

- Ball guard
- Other RAL colours on request

WALL MOUNTED

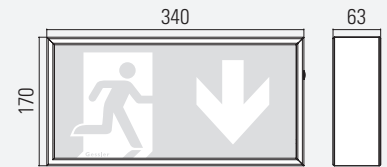

CEILING MOUNTED

